

M12 Inductive DC Proximity Switches AM1/AM6

IMO

Compact inductive proximity switches for DC operation

- ø12 x 50mm and ø12 x 43.5mm
- Shielded and unshielded models
- IP67 nickel-plated brass housing
- Short-circuit protection
- LED status indicator 360° visible
- 2 wire DC (AM1)
- Additional cable exit options available
- Nominal sensing range: Shielded 2mm
Unshielded 4mm
- Long distance AM1: Shielded 4mm
Unshielded 8mm
- UL and CUL approved



Options and ordering codes

	AM1	/	AN	-	1A
Standard proximity	AM1				
ø12mm short version	AM6				
NO output state			A		
NC output state			C		
NPN output type			N		
PNP output type			P		
2 wire AM1 only			O		
Shielded					1
Unshielded					2
Long distance shielded					3
Long distance unshielded					4
Standard cable exit					A
M12 plug cable exit					H

Specification

Model	AM1/AM6
Hysteresis	10% maximum
Repeatability	5%
Supply voltage	10-30 VDC
Ripple	10% maximum
Maximum consumption	20mA
Switching frequency	AM1:2kHz, AM6:1kHz*
Output type	NPN or PNP
Output state	NO or NC
Load current	≤ 200mA
Residual output voltage	1.2V max. I _L =100mA
Leakage current	<10µA
Time delay before availability	100ms
Output current limit	250-300mA†
Short circuit protection	autoreset
Polarity reversal protection	yes
Inductive loads protection	yes
LED status indicator	yes (at the rear)
Insulation resistance	>1000mΩ to 1000VDC
Dielectric strength	1500VAC 50Hz for 1 min
Protection degree	IP67
Temperature range	-25° +70 °C
Temperature drift	10% Sn
Housing material	nickel-plated brass
Front material	PBT
Tightening torque	15 Nm max
Ambient humidity	35%-85% r.h.
Weight (approx.)	65g

M12 Inductive DC Proximity Switches

AM1/AM6 continued




Dimensions (mm)

Standard cable exit


Cable: $\varnothing 3.75\text{mm}$, 2m length, 0.34mm^2 conductor section, PVC material

AM1/**-A

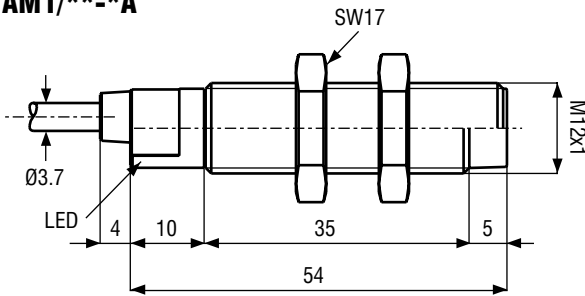


M12 plug cable exit


AM1/**-H

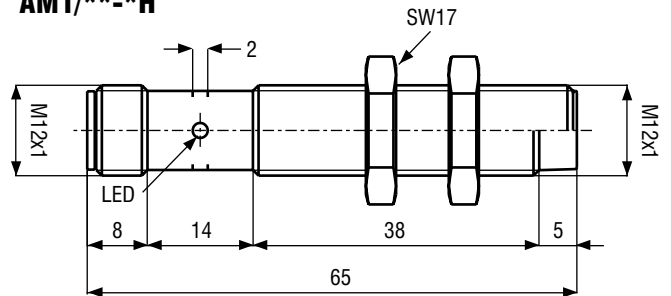

AM6/**-A

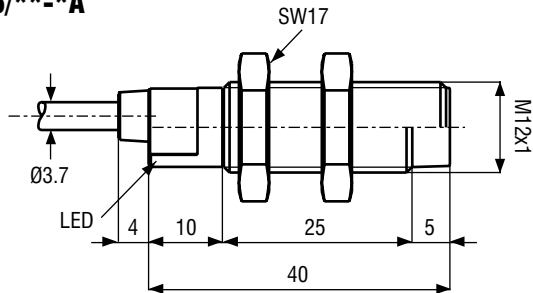


AM6/**-H

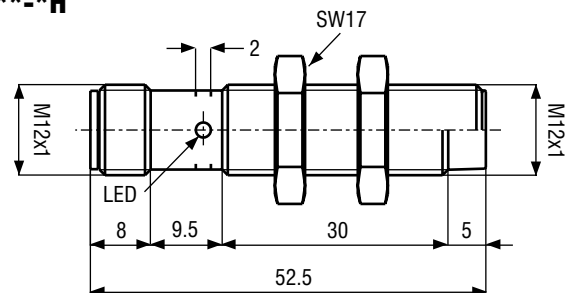


Output circuit - wiring connections

NPN output

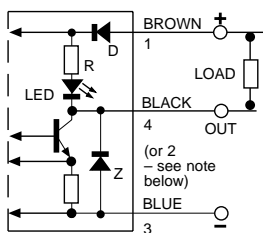


PNP output

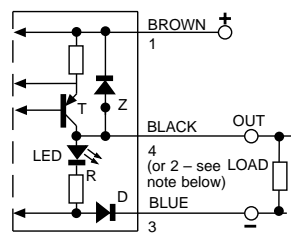

NOTE: in case of combined load, i.e. resistive and capacitive, the maximum admissible capacity (C) is $0.05\mu\text{F}$ for maximum output voltage and current.

M12 plug - pin connections Cable exit option H

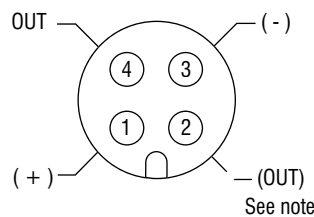

Other cable options:
 Right angle cable
 M8 Plug cable exit
 Customised cables
 Please contact IMO for price and availability

NOTE: (pin connections): At present, all plug exit sensors have the output on pin 4. According to EEC Directives, the output of NC plug exit models will be changing to pin 2 (NO will remain on pin 4). A plug cable to match these NC sensors MUST be a 4-wire type as 3-wire cables are connected to pins 1, 3 and 4 – contact IMO to check stock types.