


i³ User Start-up Guide



Getting Started:

1. Connect the 24VDC power as shown on the connector below.
2. Install i³ Configurator onto your PC.
3. Connect serial programming cable into port MJ1 port.
4. If using a USB to serial convertor (PC501), please check in Window Device Manager which com port has been assigned. Then enter menu Tools->Editor Options-> Communications port->Configure, and set accordingly.
5. Press the up and down arrows simultaneously on the front of the unit and check Network ID. Then press the target sign in the Configurator and make the Target ID match that of the i³

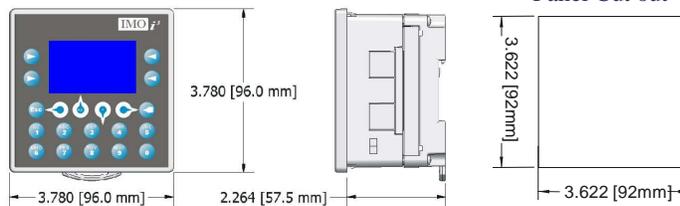


i	3	A	I	2	X	/	128x64 Display, 14 programmable keys
							24 Digital Inputs (4 HSC)
							2 Analogue Inputs (10-bit)
							0 Analogue Outputs (12 bit)
							16 Digital Outputs (2 PWM)
							2 Serial Ports, 0 CAN port, iCAN Protocol
							MicroSD Card

WARNING: Please ensure power is ON and i³ is in Idle mode before inserting SanDisk™ MicroSD.


Back cover screws.
Remove the 4 screws and back plate to access the Internal jumpers.

WARNING: Do not Over-tighten screws.




Power Connector

Power Up:
Connect to Earth Ground.
Apply 10 - 30 VDC.
Screen lights up.

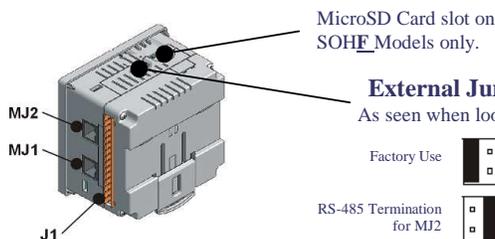

External Jumper Configuration.

As seen when looking at the top of the i³ unit

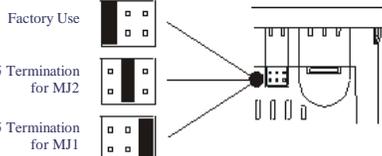

Serial Ports MJ1 / MJ2

MJ1 Serial Port Pin Assignments			
Pin	Signal	Signal Description	Direction
8	TD ¹	RS-232 Transmit Data	Out
7	RD ¹	RS-232 Receive Data	In
6	0V	Ground	-
5	+5	+5 VDC 60mA max	Out
4	RTS ¹	RS-232 Request to Send	In
3	CTS ¹	RS-232 Clear to Send	Out
2	RX/TX-	Receive/Transmit Negative	In/Out
1	RX/TX+	RS-485 Receive/Transmit Positive	In/Out

MJ2 Serial Port Pin Assignments			
Pin	Signal	Signal Description	Direction
8	TD ¹	RS-232 Transmit Data	Out
7	RD ¹	RS-232 Receive Data	In
6	0V	Ground	-
5	+5	+5 VDC 60mA max	Out
4	TX-	RS-485 Transmit Negative	In
3	TX+	RS-485 Transmit Positive	Out
2	RX-	RS-485 Receive Negative	In
1	RX+	RS-485 Receive Positive	In

¹Signals are labeled for connection to a DTE device
* +5 on i³ H/W Rev E and later

MJ2 RS485 Connection Examples:

Pin	MJ2 Pins	
	Signal	Direction
8	-	-
7	-	-
6	0V	Ground
5	-	-
4	TX-	OUT
3	TX+	OUT
2	RX-	IN
1	RX+	IN

Pin	MJ2 Pins	
	Signal	Direction
8	-	-
7	-	-
6	0V	Ground
5	-	-
4	-	-
3	-	-
2	TX-/RX-	IN/OUT
1	TX+/RX+	IN/OUT

This equipment is suitable for use in Class I, Division 2, Groups A, B, C and D or Non-hazardous locations only

WARNING: EXPLOSION HAZARD – Do not disconnect equipment unless power has been switched off or the area is known to be non-hazardous.

AVERTISSEMENT - RISQUE D'EXPLOSION - AVANT DE DECONNECTER L'EQUIPEMENT, COUPER LE COURANT OU S'ASSURER QUE L'EMPLACEMENT EST DESIGNÉ NON DANGEREUX.

WARNING: To avoid the risk of electric shock or burns, always connect the safety (or earth) ground before making any other connections.

WARNING: To reduce the risk of fire, electrical shock, or physical injury it is strongly recommended to fuse the voltage measurement inputs. Be sure to locate fuses as close to the source as possible.

WARNING: Replace fuse with the same type and rating to provide protection against risk of fire and shock hazards.

WARNING: In the event of repeated failure, do not replace the fuse again as a repeated failure indicates a defective condition that will not clear by replacing the fuse.

WARNING: EXPLOSION HAZARD – Substitution of components may impair suitability for Class I, Division 2
AVERTISSEMENT - RISQUE D'EXPLOSION - LA SUBSTITUTION DE COMPOSANTS PEUT RENDRE CE MATERIAL INACCEPTABLE POUR LES EMBLEMES DE CLASSE 1, DIVISION 2

WARNING: EXPLOSION HAZARD - BATTERIES MUST ONLY BE CHANGED IN AN AREA KNOWN TO BE NON-HAZARDOUS

AVERTISSEMENT - RISQUE D'EXPLOSION - AFIN D'EVITER TOUT RISQUE D'EXPLOSION, S'ASSURER QUE L'EMPLACEMENT EST DESIGNÉ NON DANGEREUX AVANT DE CHANGER LA BATTERIE

WARNING: Battery May Explode If Mistreated. Do Not Recharge, Disassemble or Dispose Of In Fire


WARNING: Only qualified electrical personnel familiar with the construction and operation of this equipment and the hazards involved should install, adjust, operate, or service this equipment. Read and understand this manual and other applicable manuals in their entirety before proceeding. Failure to observe this precaution could result in severe bodily injury or loss of life.

I/O Register Map

Registers	Description
%I1 to %I24	Digital Inputs
%I32	Output Fault
%I25 to %I31	Reserved
%Q1 to %Q16	Digital outputs
%Q17	Clear HSC1 accumulator to 0
%Q18	Totalizer: Clear HSC2 Quadrature 1-2: Accumulator 1 Reset to max - 1
%Q19	Clear HSC3 Accumulator to 0
%Q20	Totalizer: Clear HSC4 Quadrature 3-4: Accumulator 3 Reset to max - 1
%Q21 to %Q32	Reserved
%AI1 to %AI4	Analogue inputs
%AI5, %AI6	HSC1 Accumulator
%AI7, %AI8	HSC2 Accumulator
%AI9, %AI10	HSC3 Accumulator
%AI11, %AI12	HSC4 Accumulator
%AQ1, %AQ2	PWM1 Duty Cycle
%AQ3, %AQ4	PWM2 Duty Cycle
%AQ5, %AQ6	PWM Prescale
%AQ7, %AQ8	PWM Period
%AQ9 to %AQ14	Analogue outputs

Note: Not all i^3 units contain the I/O listed in this table.

Registers	PWM	HSC	Stepper
%AQ1	PWM1 Duty Cycle (32 bit)	HSC1 Preset Value	Start Frequency
%AQ2			Run Frequency
%AQ3	PWM2 Duty Cycle (32 bit)	HSC2 Preset Value	Accel Count (32 bit)
%AQ4			Run Count (32 bit)
%AQ5	PWM Prescale (32 bit)		Run Count (32 bit)
%AQ6			Run Count (32 bit)
%AQ7	PWM Period (32 bit)		Decel Count (32 bit)
%AQ8			Decel Count (32 bit)
%Q1			Run
%I30			Ready/Done
%I31			Error

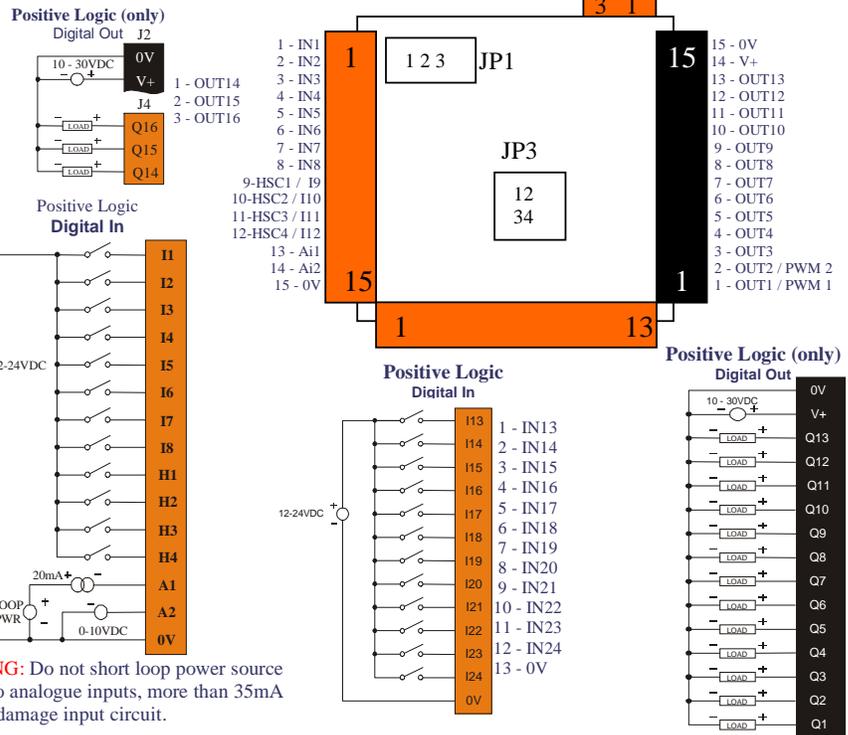

WARNING: Do not short loop power source directly to analogue inputs, more than 35mA load can damage input circuit.

Wiring Specifications


- For I/O wiring (discrete), use the following wire type or equivalent: Belden 9918, 18 AWG (0.8 mm²) or larger.
- For shielded Analogue I/O wiring, use the following wire type or equivalent: Belden 8441, 18 AWG (0.8 mm²) or larger.

Analogue I/O and Digital I/O Configuration

I/O Jumper settings are located internally. Remove the 4 screws on the back and lift casing off to access. **Only access when power is removed from the i^3 .** Care must be taken to avoid over tightening of the case screws.


Digital Input

Positive Logic vs. Negative Logic Wiring
The i^3 can be wired for Positive Logic inputs or Negative Logic inputs depending on the position of JP1.



Positive Logic In Negative Logic In

Analogue Input Filtering

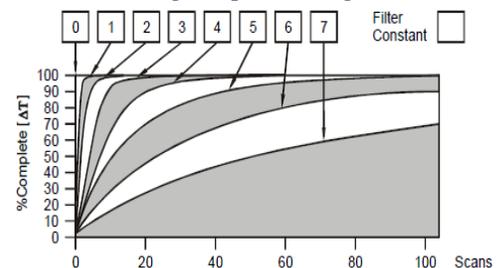

Expansion I/O Modules

All i^3 controllers can have extra analogue and digital I/O added by connecting expansion modules to either MJ1 or MJ2 ports.



iCAN based expansion I/O is also available on special request. Please inquire at IMO technical support. automation@imopc.com

Basic Options

Input - 4 Channel RTD (0-2000ohm, 0-500ohm, PT100, Ni100, PT1000, Ni1000)	iOS / M 4 I P X - D1
Input - 8 Channel DC Current (-20mA to +20mA)	iOS / M 8 I C X - D1
Input - 8 Channel DC Voltage (-10V to +10V)	iOS / M 8 I V X - D1
Input - 8 Channel Thermocouple (J, K, R, S, B, E, T, N, -/+ 50mV, -/+100mV)	iOS / M 8 I T X - D1
Output - 4 Channel DC Voltage / Current (0-20mA, 0-10V)	iOS / M 4 O X A - D1
16 Digital Input, 16 Transistor output (0.1A / Channel, 2A / Common)	GSL - D T 4 A
16 Relay Output (2A / Channel, 5A / Common)	GSL - R Y 2 A
32 Digital Input	GSL - D 2 4 A

Note: Other I/O configurations and Fieldbus options are available. Please inquire at IMO. automation@imopc.com

For further information on Remote I/O please consult the Remote I/O datasheet, and the i^3 Remote I/O tutorial in the downloads section of the IMO website. www.imopc.com/manuals

Technical Specifications				
Digital DC Inputs		Digital DC Outputs		
Inputs per Module	24 including 4 configurable HSC inputs		Outputs per Module	16 including 2 configurable PWM outputs
Commons per Module	1		Commons per Module	1
Input Voltage Range	12 VDC / 24 VDC		Output Type	Sourcing / 10 K Pull-Down
Absolute Max. Voltage	35 VDC Max.		Absolute Max. Voltage	28 VDC Max.
Input Impedance	10 kW		Output Protection	Short Circuit
Input Current	Positive Logic	Negative Logic	Max. Output Current per point	0.5 A
	Upper Threshold	0.8 mA	-1.6 mA	Max. Total Current
Lower Threshold	0.3 mA	-2.1 mA	Max. Output Supply Voltage	30 VDC
Max Upper Threshold	8 VDC		Minimum Output Supply Voltage	10 VDC
Min Lower Threshold	3 VDC		Max. Voltage Drop at Rated Current	0.25 VDC
OFF to ON Response	1 ms		Max. Inrush Current	650 mA per channel
ON to OFF Response	1 ms		Min. Load	None
HSC Max. Switching Rate	10 kHz Totalizer/Pulse,Edges 5 kHz Frequency/Pulse,Width 2.5 kHz Quadrature		OFF to ON Response	1 ms
Analog Inputs, Medium Resolution		ON to OFF Response	1 ms	
Number of Channels	2		Output Characteristics	Current Sourcing (Pos logic)
Input Ranges	0 - 10 VDC			
Safe input voltage range	0 - 20 mA		<p align="center">General Specifications</p>	
Input Impedance (Clamped @ -0.5 VDC to 12 VDC)	4 - 20 mA -0.5 V to +12V			
Current Mode:	100 W			
Voltage Mode:	500 k W			
Nominal Resolution	10 Bits		Required Power (Steady State)	130 mA @ 24 VDC
%AI full scale	32,000 counts		Required Power (Inrush)	30 A for 1 ms @ 24 VDC – DC Switched
Max. Over-Current	35 mA		Primary Power Range	10 - 30 VDC
Conversion Speed	All channels converted once per ladder scan		Relative Humidity	5 to 95% Non-condensing
Max. Error at 25°C (excluding zero)	4-20 mA	1.00%	Operating Temperature	-10°C to +60°C
	0-20 mA	1.00%		
	0-10 VDC	0.50%		
Additional error for temperatures other than 25°C	TBD		Terminal Type	Screw Type,5 mm Removable
			CE	Approved
		UL		
Filtering	160 Hz hash (noise) filter		Shock / Vibration	IEC68-2-6 and IEC68-2-27
	1-128 scan digital running average filter		Weight	12oz. (340.19g)
		Clock Accuracy	+/- 35 ppm maximum at 25° C (+/- 1.53 Minutes per Month)	

IMO Precision Controls Ltd

1000 North Circular Rd, Staples Corner, London. NW2 7JP
 Tel: +44 (0) 208 452 6444, Fax: +44 (0) 208 450 2274,
 Web: www.imopc.com

For further technical information and a full specification, please consult the Hardware Manual

Small Extras:

RS232 Serial Programming Cable
For programming any *i*³ Model.



PART No: i3PC45

IP65 RJ45 Panel-Mounted Socket
Bring either MJ1 or MJ2 ports to the outside world by installing this into a 22.5mm cut-out.



PART No: i3PAD

USB to RS232 Converter
For PCs without a serial Com Port.
Add one with this device.



PART No: PC501

**i³ Display...
Control...
Connect...**

**i³ Intergrated
Controller
& Associated Products**

Communication:

Ethernet Expansion card

Link an *i*³ to an Ethernet network. Program monitor and debug remotely, or run *i*³ as a Modbus TCP server.



PART No: i³-E

GSM Modem Expansion Card


Send and Receive SMS messages via the *i*³, dial-up connection over GSM data link for remote programming, debugging etc. Or, use a GPRS always-on data connection ideal for programming, debugging, monitoring and connection to a SCADA package for constant data logging and remote control.



PART No: i³-M

ODIN OPC SERVER (With LOKI data-logger)


With no tag limit and 30+ Protocols to choose from (including IMO products, Mitsubishi, Allen Bradley, Siemens), ODIN can be used with LOKI to log data either to an Excel spreadsheet or an Access database.



PART No: IMO-OPC-SERVER


Panel Point SCADA^{lite}

With no tag limit and 30+ Protocols to choose from (including IMO products, Mitsubishi, Allen Bradley, Siemens), a powerful graphical editor, and a VB-based scripting language, Panel-Point allows a PC to become the central data hub of an application.

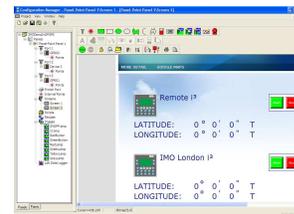

PART No: PANELPOINT (Developer)
PART No: PANELPOINTRT (Runtime)

Options:

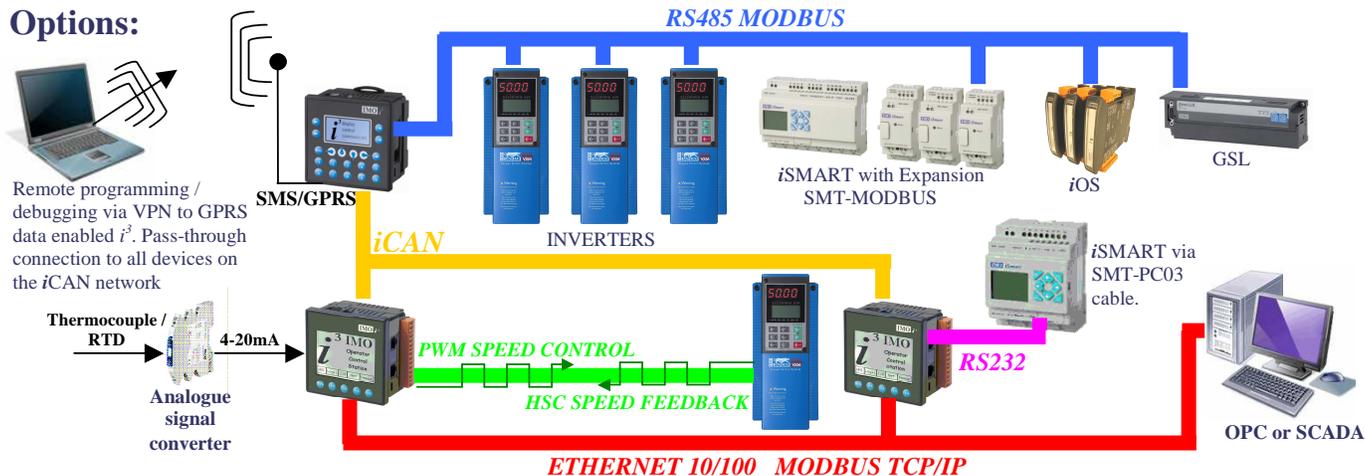


Miscellaneous:

DIN rail mounted SRSI Base and ETS Relay


Use the Transistor outputs of the *i*³ to operate the relay coils to switch up to 6A @ 250VAC.

Part Numbers: SRSI-24AC/DC, ETS-1AN-SL-24VDC

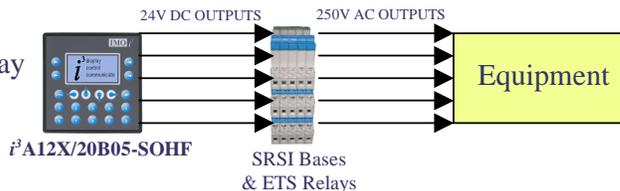

*i*³ Configurator with Symbol Library

Obtain a copy of the *i*³ Software with a library of colour buttons, pipes, vessels, motors, pumps, fans etc. To enhance the look and feel of applications on the *i*³C.

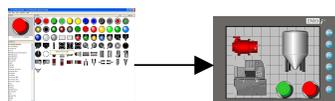

Part Numbers: IMO-CDSUITE

Custom screen overlays

Ask at IMO for custom overlays. Overlays are tooled to a customer's design.

GPS Receiver

Locate your *i*³ Controller anywhere in the world by connecting this device to MJ2 of a unit equipped with a GPRS enabled modem.



Part Number: i³-GPS