




A

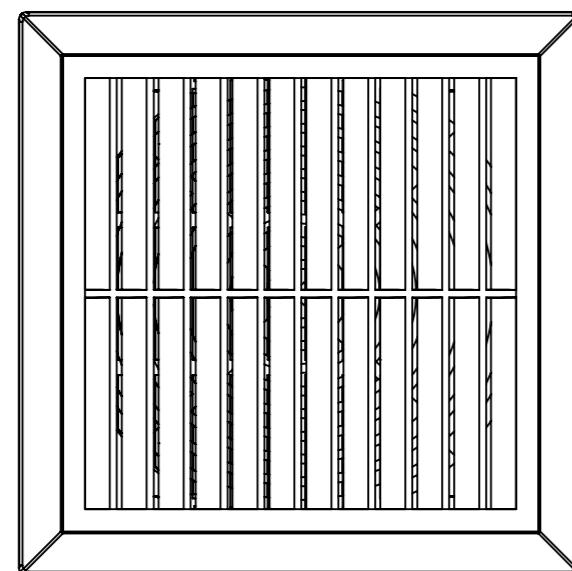


B

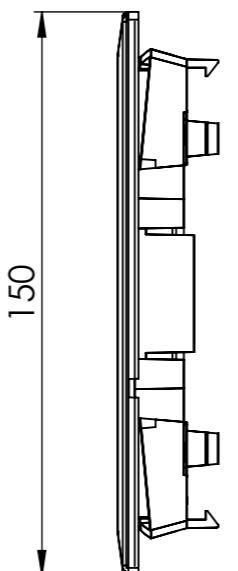

C

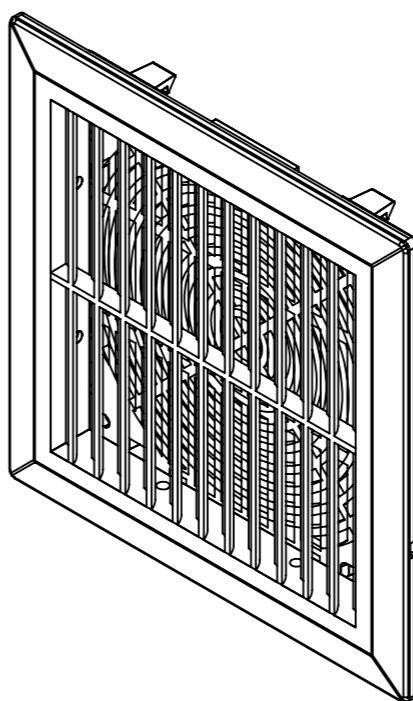

D

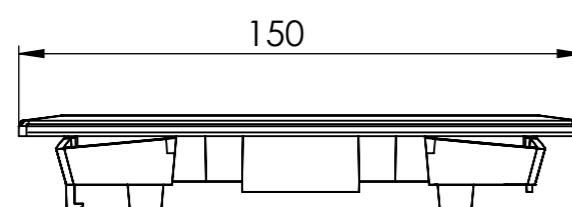


E

GENEL TOLERANSLAR
A
DIN 7168

OLCU TOL.	>0-6 ±0.1	>6-30 ±0.2	>30-120 ±0.3	>120-315 ±0.5	>315-1000 ±0.8	>1000-2000 ±1.2

A

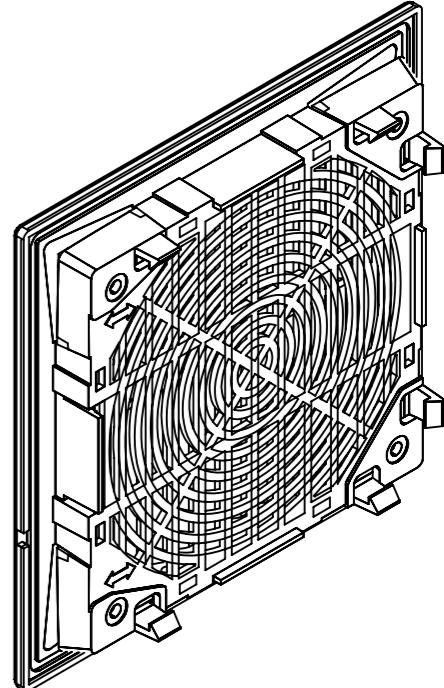

B

C

D