

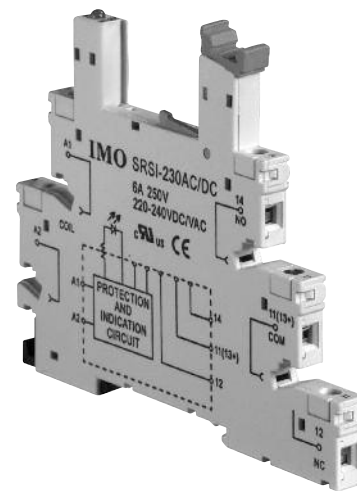



Characteristics

| | |
|---------------------------|-----------------|
| Ambient temperature | -40 to 70 °C |
| Rated voltage | 250VAC |
| Rated current | 6A (Per pole) |
| Insulation voltage (min.) | 5000VAC |
| Protection degree | IP20 |
| Socket material | PA66+GF V0 (UL) |
| Contacts spring material | QSn6.5-0.1 |
| Retainer | No |
| Modules (on request) | Self-contained |
| Terminal torque | 0.6Nm |
| Wire strip length | 7mm |



Outline dimensions

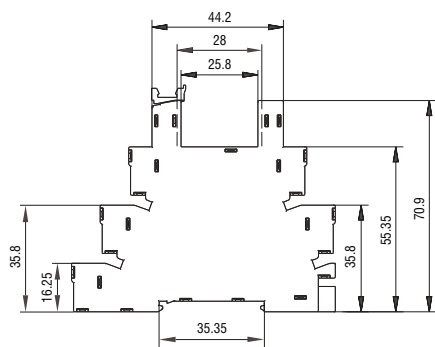

Socket/relay compatibility

| Socket P/N | Input voltage | Relay coil voltage |
|---------------|-------------------|--------------------|
| SRSI-24AC/DC | 6 to 24VDC/VAC | 6 to 24VDC |
| SRSI-60AC/DC | 48 to 60VDC/VAC | 48 to 60VDC |
| SRSI-110AC/DC | 110 to 125VDC/VAC | 60VDC |
| SRSI-230AC/DC | 220 to 240VDC/VAC | 60VDC |

Note: Input voltage polarity not required

SRSI- CC20 Busbar available in 20 way

