RL-61-F-RE-P6-N-0-21(8)A

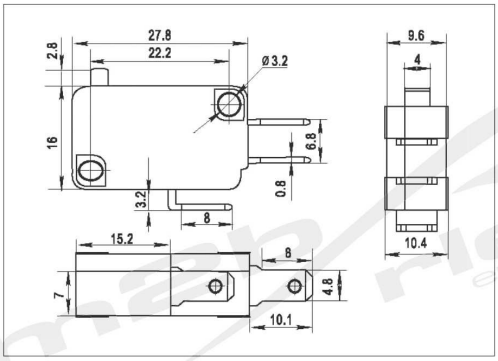

21(8)A 250V T85 1E4
16(4)A 250V T125 1E4
16(4)A 250V T85 25E3
16A 125V/250VAC T105

(G) Rating:
6(4)A 250V T125 5E4
6A 125V/250VAC T105
6A 125VAC 1E4

Mechanical life: 1E6 cycles
In-house test

Please check with our sales department
the gold contacts possibilities we produce.

RL-61

RL-61	D	BK/BK	P8	K	O

Function		Cap colour / Housing		Terminals
D	(ON)-OFF 2P	WT	White	
E	ON-(OFF) 2P	BK	Black	
F	(ON)-ON 3P	GE	Grey	

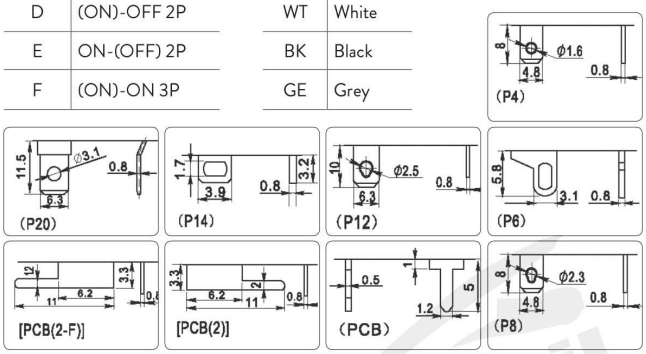

Operating Force	
K	60 ± 15 gf
L	100 ± 20 gf
M	150 ± 30 gf
N	250 ± 40 gf
X	300 ± 50 gf
Y	400 ± 50 gf
Z	500 ± 50 gf NEW



Lever Type	
0	Not Applicable
1	
2	
3	
4	
5	
6	
7	
8	
9	
10	
11	
12	
13	
14	
15	
16	
17	
18	
19	
20	
21	
22	
23	