


DOCUMENTATION TECHNIQUE : DIMENSIONS TRANSFORMATEURS MONOPHASES

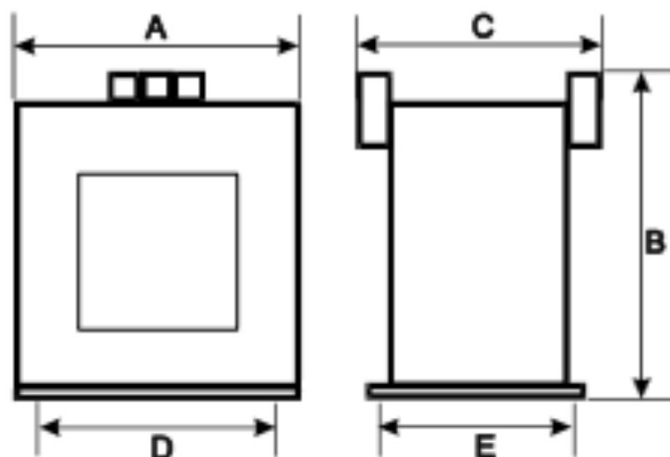

| Puissance (VA) | A | B | C | D | E | Poids |
|----------------|-----|-----|-----|------|-----|-------|
| 40 | 78 | 78 | 85 | 62.5 | 50 | 1.2 |
| 63 | 99 | 95 | 85 | 80 | 56 | 2.0 |
| 100 | 99 | 95 | 92 | 80 | 65 | 2.5 |
| 160 | 99 | 95 | 100 | 80 | 75 | 3.0 |
| 250 | 122 | 110 | 90 | 100 | 70 | 4.0 |
| 400 | 122 | 110 | 110 | 100 | 90 | 6.0 |
| 630 | 154 | 110 | 120 | 125 | 100 | 9 |
| 800 | 154 | 140 | 130 | 125 | 110 | 11 |