




MOTORISATION

Motoréducteur TKM38 B&C Caractéristiques techniques



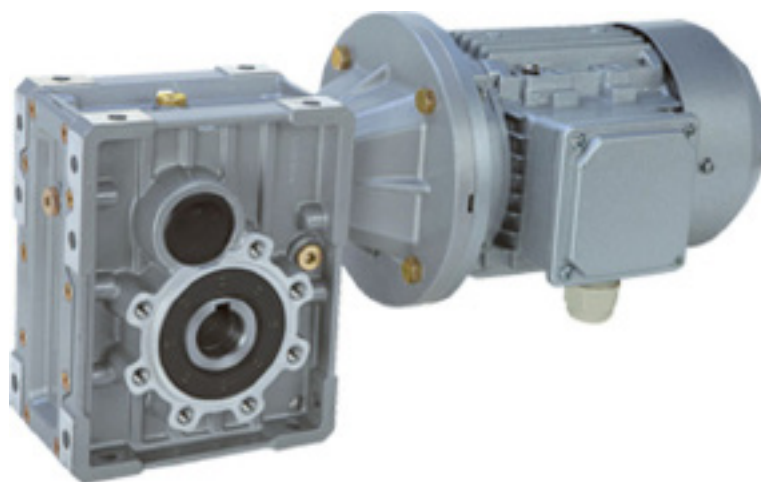

Puissance [kW]	Vitesse [tr/min]	Couple [Nm]	i nominal	i heel	Fr2 [N]	fs				Page
0.12	4.6	228	300	302.50	4800	0.9	TKM38C	63B5	6314	39
	5.7	183	250	243.57	4800	1.1	TKB38C	63B5	6314	47
	7.1	148	200	196.43	4800	1.2				
	9.2	114	150	151.56	4650	1.8				
	11.5	92	125	122.22	4330	2.0				
	13.8	76	100	101.27	4070	2.0				
	19.1	55	75	73.33	3650	2.0				
	22.1	48	60	63.33	3480	3.8				
	26.7	40	50	52.48	3270	3.8				
	23.1	47	60	60.50	3430	4.3	TKM38B	63B5	6314	38
	28.7	37	50	48.71	3190	5.3	TKB38B	63B5	6314	46
	36	30	40	39.29	2970	6.0				
	46	23	30	30.31	2720	8.6				
	0.18	9.3	171	300	302.50	4650	1.2	TKM38C	63B5	6312
11.5		138	250	243.57	4330	1.5	TKB38C	63B5	6312	47
14.3		111	200	196.43	4030	1.6				
18.5		86	150	151.56	3690	2.3				
22.9		69	125	122.22	3440	2.6				
27.6		57	100	101.27	3230	2.6				
38		41	75	73.33	2900	2.7				
44		36	60	63.33	2760	5.0				
53		30	50	52.48	2590	5.1				
7.1		222	200	196.43	4800	0.8	TKM38C	63B5	6324	39
9.2		171	150	151.56	4650	1.2	TKB38C	63B5	6324	47
11.5		138	125	122.22	4330	1.3				
13.8		114	100	101.27	4070	1.3				
19.1		83	75	73.33	3650	1.3				
22.1		72	60	63.33	3480	2.5				
26.7		59	50	52.48	3270	2.5				
23.1		70	60	60.50	3430	2.9	TKM38B	63B5	6324	38
28.7		56	50	48.71	3190	3.6	TKB38B	63B5	6324	46
36		45	40	39.29	2970	4.0				
12.3		129	75	73.33	4230	0.9	TKM38C	71B5/B14	7116	39
14.2		111	60	63.33	4030	1.6	TKB38C	71B5/B14	7116	47
17.1		92	50	52.48	3790	1.6				
14.9		109	60	60.50	3970	1.8	TKM38B	71B5/B14	7116	38
18.5		87	50	48.71	3690	2.3	TKB38B	71B5/B14	7116	46
22.9	71	40	39.29	3440	2.6					
29.7	54	30	30.31	3150	3.7					
37	44	25	24.44	2930	4.1					
44	36	20	20.25	2760	4.1					
61	26	15	14.67	2470	4.2					



Puissance [kW]	Vitesse [tr/min]	Couple [Nm]	i Nominal	i Réel	Fr2 [N]	fs				Page	
0.25	11.5	191	250	243.57	4330	1.0	TKM38C	63B5	6322	39	
	14.3	154	200	196.43	4030	1.2	TKB38C	63B5	6322	47	
	18.5	119	150	151.56	3690	1.7					
	22.9	96	125	122.22	3440	1.9					
	27.6	79	100	101.27	3230	1.9					
	38	58	75	73.33	2900	1.9					
	44	50	60	63.33	2760	3.6					
	53	41	50	52.48	2590	3.6					
	11.5	192	125	122.22	4330	0.9	TKM38C	71B5/B14	7114	39	
	13.8	159	100	101.27	4070	0.9	TKB38C	71B5/B14	7114	47	
	19.1	115	75	73.33	3650	1.0					
	22.1	99	60	63.33	3480	1.8					
	26.7	82	50	52.48	3270	1.8					
	23.1	97	60	60.50	3430	2.1	TKM38B	71B5/B14	7114	38	
	28.7	78	50	48.71	3190	2.6	TK838B	71B5/B14	7114	46	
	36	63	40	39.29	2970	2.9					
	46	49	30	30.31	2720	4.1					
	14.2	155	60	63.33	4030	1.2	TKM38C	71B5/B14	7126	39	
	17.1	128	50	52.48	3790	1.2	TKB38C	71B5/B14	7126	47	
	14.9	151	60	60.50	3970	1.3	TKM38B	71B5/B14	7126	38	
	18.5	121	50	48.71	3690	1.6	TKB38B	71B5/B14	7126	46	
	22.9	98	40	39.29	3440	1.8					
	29.7	76	30	30.31	3150	2.6					
	37	61	25	24.44	2930	3.0					
	44	50	20	20.25	2760	3.0					
	61	37	15	14.67	2470	3.0					
	0.37	18.5	176	150	151.56	3690	1.1	TKM38C	71B5/B14	7112	39
		22.9	142	125	122.22	3440	1.3	TKB38C	71B5/B14	7112	47
27.6		118	100	101.27	3230	1.3					
38		85	75	73.33	2900	1.3					
44		74	60	63.33	2760	2.4					
53		61	50	52.48	2590	2.5					
46		72	60	60.50	2720	2.8	TKM38B	71B5/B14	7112	38	
57		58	50	48.71	2530	3.5	TK838B	71B5/B14	7112	46	
71		47	40	39.29	2350	3.9					
22.1		147	60	63.33	3480	1.2	TKM38C	71B5/B14	7124	39	
26.7		122	50	52.48	3270	1.2	TKB38C	71B5/B14	7124	47	
23.1		144	60	60.50	3430	1.4	TKM38B	71B5/B14	7124	38	
28.7		116	50	48.71	3190	1.7	TKB38B	71B5/B14	7124	46	
36		93	40	39.29	2970	1.9					
46		72	30	30.31	2720	2.8					
57		58	25	24.44	2530	3.1					
69		48	20	20.25	2380	3.1					
95		35	15	14.67	2130	3.2					
14.9		223	60	60.50	3970	0.9	TKM38B	80B5/B14	8016	38	
18.5		180	50	48.71	3690	1.1	TKB38B	80B5/B14	8016	46	
22.9		145	40	39.29	3440	1.2					
29.7		112	30	30.31	3150	1.8					
37		90	25	24.44	2930	2.0					
44		75	20	20.25	2760	2.0					
61		54	15	14.67	2470	2.0					
71		47	12.5	12.67	2360	3.8					
86		39	10	10.50	2210	3.9					
118		28	7.5	7.60	1990	3.9					



Puissance [kW]	Vitesse [tr/min]	Couple [Nm]	i Nominal	i Réel	Fr2 [N]	fs				Page
0.55	22.9	211	125	122.22	3440	0.9	TKM38C	71B5/B14	7122	39
	27.6	175	100	101.27	3230	0.9	TKB38C	71B5/B14	7122	47
	38	127	75	73.33	2900	0.9				
	44	109	60	63.33	2760	1.6				
	53	91	50	52.48	2590	1.7				
	46	107	60	60.50	2720	1.9	TKM38B	71B5/B14	7122	38
	57	86	50	48.71	2530	2.3	TKB38B	71B5/B14	7122	46
	71	69	40	39.29	2350	2.6				
	92	53	30	30.31	2160	3.7				
	23.1	213	60	60.50	3430	0.9	TKM38B	80B5/B14	8014	38
	28.7	172	50	48.71	3190	1.2	TKB38B	80B5/B14	8014	46
	36	139	40	39.29	2970	1.3				
	46	107	30	30.31	2720	1.9				
	57	86	25	24.44	2530	2.1				
	69	71	20	20.25	2380	2.1				
	95	52	15	14.67	2130	2.1				
	110	45	12.5	12.67	2030	4.0				
	133	37	10	10.50	1910	4.1				
	184	27	7.5	7.60	1710	4.1				
	22.9	216	40	39.29	3440	0.8	TKM38B	80B5/B14	8026	38
29.7	166	30	30.31	3150	1.2	TKB38B	80B5/B14	8026	46	
37	134	25	24.44	2930	1.3					
44	111	20	20.25	2760	1.4					
61	80	15	14.67	2470	1.4					
71	70	12.5	12.67	2360	2.6					
86	58	10	10.50	2210	2.6					
118	42	7.5	7.60	1990	2.6					
0.75	44	149	60	63.33	2760	1.2	TKM38C	80B5/B14	8012	39
	53	124	50	52.48	2590	1.2	TKB38C	80B5/B14	8012	47
	46	145	60	60.50	2720	1.4	TKM38B	80B5/B14	8012	38
	57	117	50	48.71	2530	1.7	TKB38B	80B5/B14	8012	46
	71	94	40	39.29	2350	1.9				
	92	73	30	30.31	2160	2.7				
	115	59	25	24.44	2010	3.1				
	138	49	20	20.25	1890	3.1				
	191	35	15	14.67	1690	3.1				
	28.7	234	50	48.71	3190	0.9	TKM38B	80B5/B14	8024	38
	36	189	40	39.29	2970	1.0	TKB38B	80B5/B14	8024	46
	46	146	30	30.31	2720	1.4				
	57	118	25	24.44	2530	1.5				
	69	97	20	20.25	2380	1.5				
	95	71	15	14.67	2130	1.6				
	110	61	12.5	12.67	2030	3.0				
	133	50	10	10.50	1910	3.0				
	184	37	7.5	7.60	1710	3.0				
	29.7	227	30	30.31	3150	0.9	TKM38B	90B5/B14	9056	38
	37	183	25	24.44	2930	1.0	TKB38B	90B5/B14	9056	46
44	151	20	20.25	2760	1.0					
61	110	15	14.67	2470	1.0					
71	95	12.5	12.67	2360	1.9					
86	79	10	10.50	2210	1.9					
118	57	7.5	7.60	1990	1.9					



Puissance [kW]	Vitesse [tr/min]	Couple [Nm]	i Nominal	i Réel	Fr2 [N]	fs				Page
1.1	46	213	60	60.50	2720	0.9	TKM38B	80B5/B14	8022	38
	57	172	50	48.71	2530	1.2	TKB38B	80B5/B14	8022	46
	71	139	40	39.29	2350	1.3				
	92	107	30	30.31	2160	1.9				
	115	86	25	24.44	2010	2.1				
	138	71	20	20.25	1890	2.1				
	191	52	15	14.67	1690	2.1				
	221	45	12.5	12.67	1610	4.0				
	267	37	10	10.50	1510	4.1				
	368	27	7.5	7.60	1360	4.1				
1.1	46	214	30	30.31	2720	0.9	TKM38B	90B5/B14	90S4	38
	57	172	25	24.44	2530	1.0	TKB38B	90B5/B14	90S4	46
	69	143	20	20.25	2380	1.1				
	95	103	15	14.67	2130	1.1				
	110	89	12.5	12.67	2030	2.0				
	133	74	10	10.50	1910	2.0				
	184	54	7.5	7.60	1710	2.1				
	71	139	12.5	12.67	2360	1.3	TKM38B	90B5/B14	90L6	38
	86	115	10	10.50	2210	1.3	TKB38B	90B5/814	90L6	46
	118	83	7.5	7.60	1990	1.3				
1.5	57	234	50	48.71	2530	0.9	TKM38B	90B5/B14	90S2	38
	71	189	40	39.29	2350	1.0	TKB38B	90B5/B14	90S2	46
	92	146	30	30.31	2160	1.4				
	115	118	25	24.44	2010	1.5				
	138	97	20	20.25	1890	1.5				
	191	71	15	14.67	1690	1.6				
	221	61	12.5	12.67	1610	3.0				
	267	50	10	10.50	1510	3.0				
	368	37	7.5	7.60	1360	3.0				
	57	235	25	24.44	2530	0.8	TKM38B	90B5/B14	90L4	38
69	195	20	20.25	2380	0.8	TKB38B	90B5/B14	90L4	46	
95	141	15	14.67	2130	0.8					
110	122	12.5	12.67	2030	1.5					
133	101	10	10.50	1910	1.5					
184	73	7.5	7.60	1710	1.5					
2.2	92	214	30	30.31	2160	0.9	TKM38B	90B5/B14	90L2	38
	115	172	25	24.44	2010	1.0	TKB38B	90B5/B14	90L2	46
	138	143	20	20.25	1890	1.1				
	191	103	15	14.67	1690	1.1				
	221	89	12.5	12.67	1610	2.0				
	267	74	10	10.50	1510	2.0				
	368	54	7.5	7.60	1360	2.1				



VOS BESOINS, NOS SERVICES

SARL Technic-Achat
9, rue du Lugan, 33130 BEGLES, France
TEL : 05.57.99.01.72 FAX : 05.56.87.97.66
www.technic-achat.com