




MOTORISATION

Motoréducteur TKM48 B&C Caractéristiques techniques



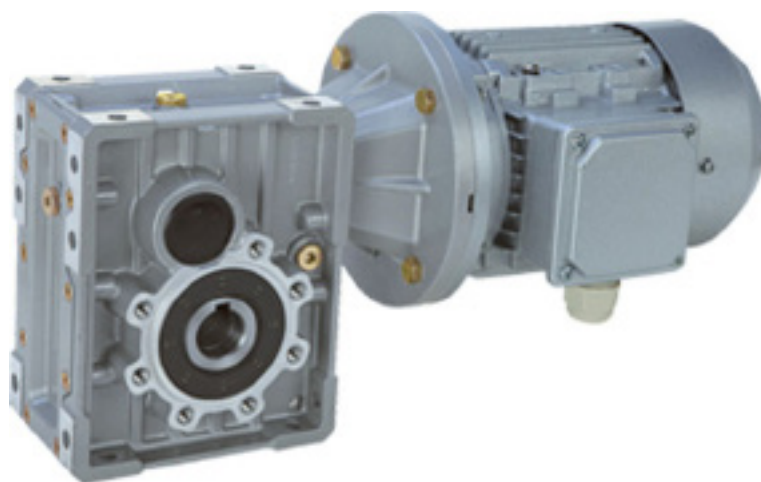

| Puissance [kW] | Vitesse [tr/min] | Couple [Nm] | i nominal | i réel | Fr2 [N] | fs | | | | Page |
|----------------|------------------|-------------|-----------|--------|---------|--------|--------|-------|------|------|
| 0.12 | 4.7 | 224 | 300 | 297.21 | 6500 | 1.6 | TKM48C | 63B5 | 6314 | 41 |
| | 5.8 | 181 | 250 | 240.89 | 6500 | 1.9 | TKB48C | 638B5 | 6314 | 49 |
| | 7.0 | 151 | 200 | 200.66 | 6500 | 2.0 | | | | |
| | 9.3 | 114 | 150 | 151.20 | 6500 | 3.1 | | | | |
| | 11.1 | 95 | 125 | 125.95 | 5980 | 3.2 | | | | |
| | 14.1 | 75 | 100 | 99.22 | 5520 | 3.2 | | | | |
| | 18.6 | 57 | 75 | 75.45 | 5040 | 3.5 | | | | |
| 0.18 | 9.4 | 168 | 300 | 297.21 | 6320 | 2.1 | TKM48C | 63B5 | 6312 | 41 |
| | 11.6 | 136 | 250 | 240.89 | 5890 | 2.6 | TKB48C | 63B5 | 6312 | 49 |
| | 14.0 | 113 | 200 | 200.66 | 5540 | 2.6 | | | | |
| | 18.5 | 85 | 150 | 151.20 | 5040 | 4.1 | | | | |
| | 4.7 | 336 | 300 | 297.21 | 6500 | 1.0 | TKM48C | 63B5 | 6324 | 41 |
| | 5.8 | 272 | 250 | 240.89 | 6500 | 1.3 | TKB48C | 63B5 | 6324 | 49 |
| | 7.0 | 227 | 200 | 200.66 | 6500 | 1.3 | | | | |
| | 9.3 | 171 | 150 | 151.20 | 6500 | 2.0 | | | | |
| | 11.1 | 142 | 125 | 125.95 | 5980 | 2.1 | | | | |
| | 14.1 | 112 | 100 | 99.22 | 5520 | 2.1 | | | | |
| | 18.6 | 85 | 75 | 75.45 | 5040 | 2.3 | | | | |
| | 4.5 | 353 | 200 | 200.66 | 6500 | 0.9 | TKM48C | 71B5 | 7116 | 41 |
| | 6.0 | 266 | 150 | 151.20 | 6500 | 1.3 | TKB48C | 71B5 | 7116 | 49 |
| | 7.1 | 221 | 125 | 125.95 | 6500 | 1.4 | | | | |
| | 9.1 | 174 | 100 | 99.22 | 6400 | 1.4 | | | | |
| | 11.9 | 133 | 75 | 75.45 | 5840 | 1.5 | | | | |
| | 14.4 | 110 | 60 | 62.43 | 5480 | 2.7 | | | | |
| | 18.3 | 86 | 50 | 49.18 | 5060 | 2.8 | | | | |
| | 15.1 | 107 | 60 | 59.44 | 5390 | 3.3 | TKM48B | 71B5 | 7116 | 40 |
| 18.7 | 87 | 50 | 48.18 | 5030 | 4.0 | TKB48B | 71B5 | 7116 | 48 | |
| 0.25 | 9.4 | 233 | 300 | 297.21 | 6320 | 1.5 | TKM48C | 63B5 | 6322 | 41 |
| | 11.6 | 189 | 250 | 240.89 | 5890 | 1.9 | TKB48C | 63B5 | 6322 | 49 |
| | 14.0 | 157 | 200 | 200.66 | 5540 | 1.9 | | | | |
| | 18.5 | 119 | 150 | 151.20 | 5040 | 3.0 | | | | |
| | 22.2 | 99 | 125 | 125.95 | 4750 | 3.0 | | | | |
| | 28.2 | 78 | 100 | 99.22 | 4380 | 3.1 | | | | |
| | 37 | 59 | 75 | 75.45 | 4000 | 3.4 | | | | |
| | 5.8 | 378 | 250 | 240.89 | 6500 | 0.9 | TKM48C | 71B5 | 7114 | 41 |
| | 7.0 | 315 | 200 | 200.66 | 6500 | 1.0 | TKB48C | 71B5 | 7114 | 49 |
| | 9.3 | 237 | 150 | 151.20 | 6500 | 1.5 | | | | |
| | 11.1 | 198 | 125 | 125.95 | 5980 | 1.5 | | | | |
| | 14.1 | 156 | 100 | 99.22 | 5520 | 1.5 | | | | |
| | 18.6 | 118 | 75 | 75.45 | 5040 | 1.7 | | | | |
| | 22.4 | 98 | 60 | 62.43 | 4730 | 3.1 | | | | |
| | 28.5 | 77 | 50 | 49.18 | 4370 | 3.1 | | | | |
| | 6.0 | 369 | 150 | 151.20 | 6500 | 0.9 | TKM48C | 71B5 | 7126 | 41 |
| | 7.1 | 307 | 125 | 125.95 | 6500 | 1.0 | TKB48C | 71B5 | 7126 | 49 |



Motoréducteur TKM48 B&C

Caractéristiques techniques

VOS BESOINS, NOS SERVICES

| Puissance [KW] | Vitesse [tr/min] | Couple [Nm] | I Nominal | I Réal | T _{tr} [N] | η | | | | Page |
|-------------------|---------------------|----------------|--------------|-----------|------------------------|--------|----------|------|------|------|
| 0.25 | 9.4 | 233 | 300 | 297.21 | 6320 | 1.5 | TKM48C | 63B5 | 6322 | 41 |
| | 11.6 | 189 | 250 | 240.89 | 5890 | 1.9 | TKB48C | 63B5 | 6322 | 49 |
| | 14.0 | 157 | 200 | 200.66 | 5540 | 1.9 | | | | |
| | 18.5 | 119 | 150 | 151.20 | 5040 | 3.0 | | | | |
| | 22.2 | 99 | 125 | 125.95 | 4750 | 3.0 | | | | |
| | 28.2 | 78 | 100 | 99.22 | 4380 | 3.1 | | | | |
| | 37 | 59 | 75 | 75.45 | 4000 | 3.4 | | | | |
| | 5.8 | 378 | 250 | 240.89 | 6500 | 0.9 | TKM48C | 71B5 | 7114 | 41 |
| | 7.0 | 315 | 200 | 200.66 | 6500 | 1.0 | TKB48C | 71B5 | 7114 | 49 |
| | 9.3 | 237 | 150 | 151.20 | 6500 | 1.5 | | | | |
| | 11.1 | 198 | 125 | 125.95 | 5980 | 1.5 | | | | |
| | 14.1 | 156 | 100 | 99.22 | 5520 | 1.5 | | | | |
| | 18.6 | 118 | 75 | 75.45 | 5040 | 1.7 | | | | |
| | 22.4 | 98 | 60 | 62.43 | 4730 | 3.1 | | | | |
| 28.5 | 77 | 50 | 49.18 | 4370 | 3.1 | | | | | |
| 0.25 | 6.0 | 369 | 150 | 151.20 | 6500 | 0.9 | TKM48C | 71B5 | 7126 | 41 |
| | 7.1 | 307 | 125 | 125.95 | 6500 | 1.0 | TKB48C | 71B5 | 7126 | 49 |
| 0.25 | 9.1 | 242 | 100 | 99.22 | 6400 | 1.0 | TKM48C | 71B5 | 7126 | 41 |
| | 11.9 | 184 | 75 | 75.45 | 5840 | 1.1 | TKB48C | 71B5 | 7126 | 49 |
| | 14.4 | 152 | 60 | 62.43 | 5480 | 2.0 | | | | |
| | 18.3 | 120 | 50 | 49.18 | 5060 | 2.0 | | | | |
| | 15.1 | 148 | 60 | 59.44 | 5390 | 2.4 | TKM48B | 71B5 | 7126 | 40 |
| | 18.7 | 120 | 50 | 48.18 | 5030 | 2.9 | TKB48B | 71B5 | 7126 | 48 |
| 22.4 | 100 | 40 | 40.13 | 4730 | 3.0 | | | | | |
| 0.37 | 9.4 | 345 | 300 | 297.21 | 6320 | 1.0 | TKM48C | 71B5 | 7112 | 41 |
| | 11.6 | 280 | 250 | 240.89 | 5890 | 1.3 | TKB48C | 71B5 | 7112 | 49 |
| | 14.0 | 233 | 200 | 200.66 | 5540 | 1.3 | | | | |
| | 18.5 | 176 | 150 | 151.20 | 5040 | 2.0 | | | | |
| | 22.2 | 146 | 125 | 125.95 | 4750 | 2.1 | | | | |
| | 28.2 | 115 | 100 | 99.22 | 4380 | 2.1 | | | | |
| | 37 | 88 | 75 | 75.45 | 4000 | 2.3 | | | | |
| | 45 | 72 | 60 | 62.43 | 3750 | 4.1 | | | | |
| | 57 | 57 | 50 | 49.18 | 3470 | 4.2 | | | | |
| | 9.3 | 351 | 150 | 151.20 | 6500 | 1.0 | TKM48C | 71B5 | 7124 | 41 |
| | 11.1 | 292 | 125 | 125.95 | 5980 | 1.0 | TKB48C | 71B5 | 7124 | 49 |
| | 14.1 | 230 | 100 | 99.22 | 5520 | 1.0 | | | | |
| | 18.6 | 175 | 75 | 75.45 | 5040 | 1.1 | | | | |
| | 22.4 | 145 | 60 | 62.43 | 4730 | 2.1 | | | | |
| | 28.5 | 114 | 50 | 49.18 | 4370 | 2.1 | | | | |
| | 23.6 | 141 | 60 | 59.44 | 4660 | 2.5 | TKM48B | 71B5 | 7124 | 40 |
| | 29.1 | 114 | 50 | 48.18 | 4340 | 3.1 | TKB48B | 71B5 | 7124 | 48 |
| | 35 | 95 | 40 | 40.13 | 4080 | 3.2 | | | | |
| 14.4 | 225 | 60 | 62.43 | 5480 | 1.3 | TKM48C | 8085/814 | 8016 | 41 | |
| 18.3 | 178 | 50 | 49.18 | 5060 | 1.4 | TKB48C | 8085/814 | 8016 | 49 | |
| 15.1 | 219 | 60 | 59.44 | 5390 | 1.6 | TKM48B | 8085/814 | 8016 | 40 | |
| 18.7 | 178 | 50 | 48.18 | 5030 | 2.0 | TKB48B | 8085/814 | 8016 | 48 | |
| 22.4 | 148 | 40 | 40.13 | 4730 | 2.0 | | | | | |
| 29.8 | 112 | 30 | 30.24 | 4310 | 3.1 | | | | | |
| 36 | 93 | 25 | 25.19 | 4050 | 3.2 | | | | | |
| 45 | 73 | 20 | 19.84 | 3740 | 3.3 | | | | | |
| 60 | 56 | 15 | 15.09 | 3410 | 3.6 | | | | | |



Motoréducteur TKM48 B&C

Caractéristiques techniques

VOS BESOINS, NOS SERVICES

| Puissance [kW] | Vitesse [tr/min] | Couple [Nm] | i Nominal | i [t/c] | Fr2 [N] | f _s | | | | Page |
|-------------------|---------------------|----------------|--------------|------------|------------|----------------|--------|----------|------|------|
| 0.55 | 14.8 | 346 | 200 | 200.66 | 5540 | 0.9 | TKM48C | 71B5 | 7122 | 41 |
| | 18.5 | 261 | 150 | 151.20 | 5040 | 1.3 | TKB48C | 71B5 | 7122 | 49 |
| | 22.2 | 217 | 125 | 125.95 | 4750 | 1.4 | | | | |
| | 28.2 | 171 | 100 | 99.22 | 4380 | 1.4 | | | | |
| | 37 | 130 | 75 | 75.45 | 4000 | 1.5 | | | | |
| | 45 | 108 | 60 | 62.43 | 3750 | 2.8 | | | | |
| | 57 | 85 | 50 | 49.18 | 3470 | 2.8 | | | | |
| 0.55 | 47 | 105 | 60 | 59.44 | 3690 | 3.3 | TKM48B | 71B5 | 7122 | 40 |
| | 58 | 85 | 50 | 48.18 | 3440 | 4.1 | TKB48B | 71B5 | 7122 | 48 |
| | 70 | 71 | 40 | 40.13 | 3240 | 4.2 | | | | |
| | 18.6 | 260 | 75 | 75.45 | 5040 | 0.8 | TKM48C | 80B5/B14 | 8014 | 41 |
| | 22.4 | 215 | 60 | 62.43 | 4730 | 1.4 | TKB48C | 80B5/B14 | 8014 | 49 |
| | 28.5 | 170 | 50 | 49.18 | 4370 | 1.4 | | | | |
| | 23.6 | 210 | 60 | 59.44 | 4660 | 1.7 | TKM48B | 80B5/B14 | 8014 | 40 |
| | 29.1 | 170 | 50 | 48.18 | 4340 | 2.1 | TKB48B | 80B5/B14 | 8014 | 48 |
| | 35 | 142 | 40 | 40.13 | 4080 | 2.1 | | | | |
| | 46 | 107 | 30 | 30.24 | 3720 | 3.3 | | | | |
| | 56 | 89 | 25 | 25.19 | 3500 | 3.4 | | | | |
| | 71 | 70 | 20 | 19.84 | 3230 | 3.4 | | | | |
| | 93 | 53 | 15 | 15.09 | 2950 | 3.8 | | | | |
| | 14.4 | 335 | 60 | 62.43 | 5480 | 0.9 | TKM48C | 80B5/B14 | 8026 | 41 |
| | 18.3 | 264 | 50 | 49.18 | 5060 | 0.9 | TKB48C | 80B5/B14 | 8026 | 49 |
| | 15.1 | 326 | 60 | 59.44 | 5390 | 1.1 | TKM48B | 80B5/B14 | 8026 | 40 |
| | 18.7 | 264 | 50 | 48.18 | 5030 | 1.3 | TKB48B | 80B5/B14 | 8026 | 48 |
| | 22.4 | 220 | 40 | 40.13 | 4730 | 1.4 | | | | |
| | 29.8 | 166 | 30 | 30.24 | 4310 | 2.1 | | | | |
| 36 | 138 | 25 | 25.19 | 4050 | 2.2 | | | | | |
| 45 | 109 | 20 | 19.84 | 3740 | 2.2 | | | | | |
| 60 | 83 | 15 | 15.09 | 3410 | 2.4 | | | | | |
| 0.75 | 18.5 | 356 | 150 | 151.20 | 5040 | 1.0 | TKM48C | 80B5/B14 | 8012 | 41 |
| | 22.2 | 296 | 125 | 125.95 | 4750 | 1.0 | TKB48C | 80B5/B14 | 8012 | 49 |
| | 28.2 | 234 | 100 | 99.22 | 4380 | 1.0 | | | | |
| | 37 | 178 | 75 | 75.45 | 4000 | 1.1 | | | | |
| | 45 | 147 | 60 | 62.43 | 3750 | 2.0 | | | | |
| | 57 | 116 | 50 | 49.18 | 3470 | 2.1 | | | | |
| | 47 | 143 | 60 | 59.44 | 3690 | 2.4 | TKM48B | 80B5/B14 | 8012 | 40 |
| | 58 | 116 | 50 | 48.18 | 3440 | 3.0 | TKB48B | 80B5/B14 | 8012 | 48 |
| | 70 | 96 | 40 | 40.13 | 3240 | 3.1 | | | | |
| | 22.4 | 294 | 60 | 62.43 | 4730 | 1.0 | TKM48C | 80B5/B14 | 8024 | 41 |
| | 28.5 | 231 | 50 | 49.18 | 4370 | 1.0 | TKB48C | 80B5/B14 | 8024 | 49 |
| | 23.6 | 286 | 60 | 59.44 | 4660 | 1.2 | TKM48B | 80B5/B14 | 8024 | 40 |
| | 29.1 | 232 | 50 | 48.18 | 4340 | 1.5 | TKB48B | 80B5/B14 | 8024 | 48 |
| | 35 | 193 | 40 | 40.13 | 4080 | 1.6 | | | | |
| | 46 | 145 | 30 | 30.24 | 3720 | 2.4 | | | | |
| | 56 | 121 | 25 | 25.19 | 3500 | 2.5 | | | | |
| | 71 | 95 | 20 | 19.84 | 3230 | 2.5 | | | | |
| | 93 | 73 | 15 | 15.09 | 2950 | 2.8 | | | | |
| | 18.7 | 360 | 50 | 48.18 | 5030 | 1.0 | TKM48B | 90B5/B14 | 9056 | 40 |
| | 22.4 | 300 | 40 | 40.13 | 4730 | 1.0 | TKB48B | 90B5/B14 | 9056 | 48 |
| | 29.8 | 226 | 30 | 30.24 | 4310 | 1.5 | | | | |
| 36 | 188 | 25 | 25.19 | 4050 | 1.6 | | | | | |
| 45 | 148 | 20 | 19.84 | 3740 | 1.6 | | | | | |
| 60 | 113 | 15 | 15.09 | 3410 | 1.8 | | | | | |
| 72 | 93 | 12.5 | 12.49 | 3210 | 3.2 | | | | | |



| Puissance [kW] | Vitesse [tr/min] | Couple [Nm] | i Nominal | i Réel | Fr2 [N] | fs | | | | Page |
|-------------------|---------------------|----------------|--------------|-----------|------------|-----|--------|-----------|-------|------|
| 1.1 | 45 | 215 | 60 | 62.43 | 3750 | 1.4 | TKM48C | 80B5/B14 | 8022 | 41 |
| | 57 | 170 | 50 | 49.18 | 3470 | 1.4 | TKB48C | 80B5/B14 | 8022 | 49 |
| | 47 | 210 | 60 | 59.44 | 3690 | 1.7 | TKM48B | 80B5/B14 | 8022 | 40 |
| | 58 | 170 | 50 | 48.18 | 3440 | 2.1 | TKB48B | 80B5/B14 | 8022 | 48 |
| | 70 | 142 | 40 | 40.13 | 3240 | 2.1 | | | | |
| | 93 | 107 | 30 | 30.24 | 2950 | 3.3 | | | | |
| | 111 | 89 | 25 | 25.19 | 2770 | 3.4 | | | | |
| | 141 | 70 | 20 | 19.84 | 2560 | 3.4 | | | | |
| | 186 | 53 | 15 | 15.09 | 2340 | 3.8 | | | | |
| | 29 | 340 | 50 | 48.18 | 4340 | 1.0 | TKM48B | 90B5/B14 | 9054 | 40 |
| | 35 | 283 | 40 | 40.13 | 4080 | 1.1 | TKB48B | 90B5/B14 | 9054 | 48 |
| | 46 | 213 | 30 | 30.24 | 3720 | 1.6 | | | | |
| | 56 | 178 | 25 | 25.19 | 3500 | 1.7 | | | | |
| | 71 | 140 | 20 | 19.84 | 3230 | 1.7 | | | | |
| | 93 | 106 | 15 | 15.09 | 2950 | 1.9 | | | | |
| | 112 | 88 | 12.5 | 12.49 | 2770 | 3.4 | | | | |
| | 142 | 69 | 10 | 9.84 | 2550 | 3.5 | | | | |
| | 187 | 53 | 7.5 | 7.48 | 2330 | 3.8 | | | | |
| | 29.8 | 332 | 30 | 30.24 | 4310 | 1.1 | TKM48B | 90B5/B14 | 90L6 | 40 |
| | 36 | 276 | 25 | 25.19 | 4050 | 1.1 | TKB48B | 90B5/B14 | 90L6 | 48 |
| 45 | 218 | 20 | 19.84 | 3740 | 1.1 | | | | | |
| 60 | 166 | 15 | 15.09 | 3410 | 1.2 | | | | | |
| 72 | 137 | 12.5 | 12.49 | 3210 | 2.2 | | | | | |
| 91 | 108 | 10 | 9.84 | 2960 | 2.2 | | | | | |
| 120 | 82 | 7.5 | 7.48 | 2700 | 2.4 | | | | | |
| 1.5 | 45 | 294 | 60 | 62.43 | 3750 | 1.0 | TKM48C | 90B5/B14 | 9052 | 41 |
| | 57 | 231 | 50 | 49.18 | 3470 | 1.0 | TKB48C | 90B5/B14 | 9052 | 49 |
| | 47 | 286 | 60 | 59.44 | 3690 | 1.2 | TKM48B | 90B5/B14 | 9052 | 40 |
| | 58 | 232 | 50 | 48.18 | 3440 | 1.5 | TKB48B | 90B5/B14 | 9052 | 48 |
| | 70 | 193 | 40 | 40.13 | 3240 | 1.6 | | | | |
| | 93 | 145 | 30 | 30.24 | 2950 | 2.4 | | | | |
| | 111 | 121 | 25 | 25.19 | 2770 | 2.5 | | | | |
| | 141 | 95 | 20 | 19.84 | 2560 | 2.5 | | | | |
| | 186 | 73 | 15 | 15.09 | 2340 | 2.8 | | | | |
| | 35 | 386 | 40 | 40.13 | 4080 | 0.8 | TKM48B | 90B5/B14 | 90L4 | 40 |
| | 46 | 291 | 30 | 30.24 | 3720 | 1.2 | TKB48B | 90B5/B14 | 90L4 | 48 |
| | 56 | 242 | 25 | 25.19 | 3500 | 1.2 | | | | |
| | 71 | 191 | 20 | 19.84 | 3230 | 1.3 | | | | |
| | 93 | 145 | 15 | 15.09 | 2950 | 1.4 | | | | |
| | 112 | 120 | 12.5 | 12.49 | 2770 | 2.5 | | | | |
| | 142 | 95 | 10 | 9.84 | 2550 | 2.5 | | | | |
| | 187 | 72 | 7.5 | 7.48 | 2330 | 2.8 | | | | |
| | 45 | 297 | 20 | 19.84 | 3740 | 0.8 | TKM48B | 100B5/B14 | 100L6 | 40 |
| | 60 | 226 | 15 | 15.09 | 3410 | 0.9 | TKB48B | 100B5/B14 | 100L6 | 48 |
| | 72 | 187 | 12.5 | 12.49 | 3210 | 1.6 | | | | |
| 91 | 147 | 10 | 9.84 | 2960 | 1.6 | | | | | |
| 120 | 112 | 7.5 | 7.48 | 2700 | 1.8 | | | | | |



| Puissance [kW] | Vitesse [tr/min] | Couple [Nm] | i Nominal | i Réel | Fr2 [N] | fs | | | | Page |
|-------------------|---------------------|----------------|--------------|-----------|------------|-----|--------|-----------|--------|------|
| 2.2 | 58 | 340 | 30 | 48.18 | 3440 | 10 | TKM48B | 90B5/B14 | 90L2 | 40 |
| | 70 | 283 | 40 | 40.13 | 3240 | 11 | TKB48B | 90B5/B14 | 90L2 | 48 |
| | 93 | 213 | 30 | 30.24 | 2950 | 16 | | | | |
| | 111 | 178 | 25 | 25.19 | 2770 | 17 | | | | |
| | 141 | 140 | 20 | 19.84 | 2560 | 17 | | | | |
| | 186 | 106 | 15 | 15.09 | 2340 | 19 | | | | |
| | 224 | 88 | 12.5 | 12.49 | 2190 | 24 | | | | |
| | 285 | 69 | 10 | 9.84 | 2030 | 25 | | | | |
| | 374 | 53 | 7.5 | 7.48 | 1850 | 28 | | | | |
| | 56 | 355 | 25 | 25.19 | 3500 | 0.8 | TKM48B | 100B5/B14 | 100LA4 | 40 |
| | 71 | 280 | 20 | 19.84 | 3230 | 0.9 | TKB48B | 100B5/B14 | 100LA4 | 48 |
| | 93 | 213 | 15 | 15.09 | 2950 | 0.9 | | | | |
| | 112 | 176 | 12.5 | 12.49 | 2770 | 1.7 | | | | |
| | 142 | 139 | 10 | 9.84 | 2550 | 1.7 | | | | |
| | 187 | 106 | 7.5 | 7.48 | 2330 | 1.9 | | | | |
| | 72 | 274 | 12.5 | 12.49 | 3210 | 1.1 | TKM48B | 112B5/B14 | 112M6 | 40 |
| | 91 | 216 | 10 | 9.84 | 2960 | 1.1 | TKB48B | 112B5/B14 | 112M6 | 48 |
| | 120 | 164 | 7.5 | 7.48 | 2700 | 1.2 | | | | |
| 3.0 | 70 | 386 | 40 | 40.13 | 3240 | 0.8 | TKM48B | 100B5/B14 | 100L2 | 40 |
| | 93 | 291 | 30 | 30.24 | 2950 | 1.2 | TKB48B | 100B5/B14 | 100L2 | 48 |
| | 111 | 242 | 25 | 25.19 | 2770 | 1.2 | | | | |
| | 141 | 191 | 20 | 19.84 | 2560 | 1.3 | | | | |
| | 186 | 145 | 15 | 15.09 | 2340 | 1.4 | | | | |
| | 224 | 120 | 12.5 | 12.49 | 2190 | 2.5 | | | | |
| | 285 | 95 | 10 | 9.84 | 2030 | 2.5 | | | | |
| | 374 | 72 | 7.5 | 7.48 | 1850 | 2.8 | | | | |
| | 112 | 240 | 12.5 | 12.49 | 2770 | 1.2 | TKM48B | 100B5/B14 | 100L84 | 40 |
| | 142 | 189 | 10 | 9.84 | 2550 | 1.3 | TKB48B | 100B5/B14 | 100L84 | 48 |
| 187 | 144 | 7.5 | 7.48 | 2330 | 1.4 | | | | | |
| 4.0 | 93 | 388 | 30 | 30.24 | 2950 | 0.9 | TKM48B | 112B5/B14 | 112M2 | 40 |
| | 111 | 323 | 25 | 25.19 | 2770 | 0.9 | TKB48B | 112B5/B14 | 112M2 | 48 |
| | 141 | 254 | 20 | 19.84 | 2560 | 0.9 | | | | |
| | 186 | 194 | 15 | 15.09 | 2340 | 1.0 | | | | |
| | 224 | 160 | 12.5 | 12.49 | 2190 | 1.9 | | | | |
| | 285 | 126 | 10 | 9.84 | 2030 | 1.9 | | | | |
| | 374 | 96 | 7.5 | 7.48 | 1850 | 2.1 | | | | |
| | 112 | 320 | 12.5 | 12.49 | 2770 | 0.9 | TKM48B | 112B5/B14 | 112M4 | 40 |
| | 142 | 252 | 10 | 9.84 | 2550 | 1.0 | TKB48B | 112B5/B14 | 112M4 | 48 |
| | 187 | 192 | 7.5 | 7.48 | 2330 | 1.0 | | | | |



VOS BESOINS, NOS SERVICES

SARL Technic-Achat
9, rue du Lugan, 33130 BEGLES, France
TEL : 05.57.99.01.72 FAX : 05.56.87.97.66
www.technic-achat.com