

i³A Lite Intelligent Control Station



Technical Datasheet


Key Features

- 128 x 64 monochrome LCD display
- MicroSD™ data storage
- Real time clock
- 1 CAN Port, 1 RS-232, 1 RS-485
- Addressable function keys
- IP65 (NEMA 4X)
- Free configuration software



Options & Ordering Codes

Standard Options	DI	DO	AI	A0
i3AL12X/10D12-SCHF	12	6 Relay + 2	4	2
i3AL12X/10D14-SCHF	12	12	4	2

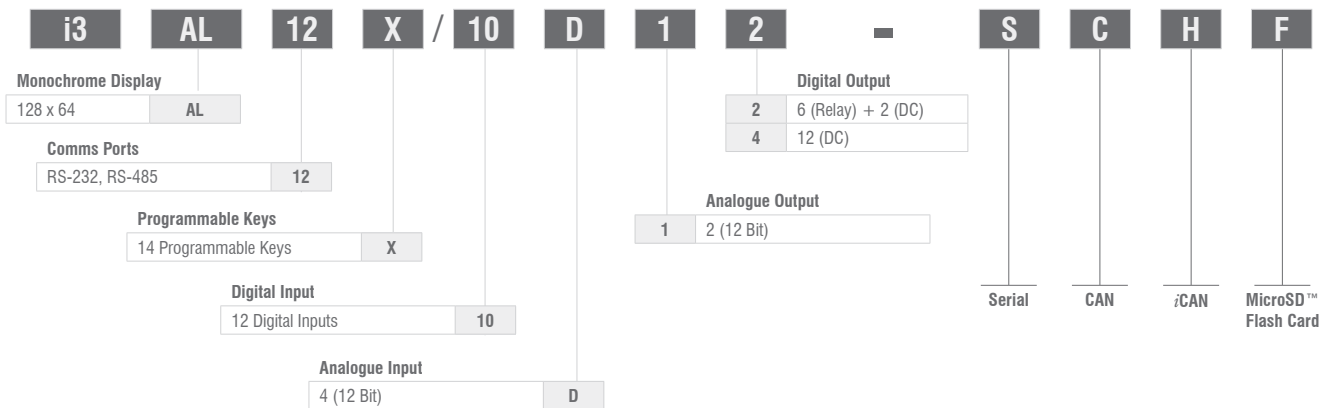

i³A Lite Intelligent Control Station



Technical Datasheet

Technical Specifications

General Specifications

Required Power (Steady State)	64mA @ 24VDC
Primary Voltage Range	24VDC ± 20%
Inrush Current	30A for <1ms
Relative Humidity	5 to 95% Non-Condensing
Clock Accuracy	+/-90 seconds per month at 20°C
Operating Temperature	-10°C to +60°C
Storage Temperature	-20°C to +70°C
Weight	0.340kg

Display Specifications

Display Type	2.2" Monochrome LCD
Resolution	128 x 64 Pixels
Keys	Membrane type switches w/metal dome - 20 numbers
Screen Memory	256kB
User-Programmable Screens	250 (max. 15 objects per screen)
Backlight	LED - 50,000 hour life
Screen Update Rate	User configurable within the scan time (perceived as instantaneous in many cases)

I/O Specifications

Digital DC Inputs

Inputs per Module	12 including 4 configurable HSC inputs	
Commons per Module	1	
Input Voltage Range	24 VDC	
Absolute Max. Voltage	35 VDC Max	
Input Impedance	10 kΩ	
Input Current	Positive Logic	Negative Logic
Upper Threshold	0.8mA	-1.6mA
Lower Threshold	0.3mA	-2.1mA
Max. Upper Threshold	8 VDC	
Max. Lower Threshold	3 VDC	
OFF to ON Response	1 ms	
ON to OFF Response	1 ms	
HSC Max. Switching Rate	10kHz - Totalize 2.5kHz - Quadrature 5kHz - Per Frequency	

Digital DC Outputs - Sinking (PWM)

Outputs per Module	2 (PWM)
Commons per Module	1
Type	Sinking w/optional 10kΩ pull-up
Absolute Max. Voltage	28VDC
Output Protection	Short Circuit
Max. Output per Point: Sinking	500mA
Max. Voltage Drop at Rated Current	0.25VDC
Max. Inrush	650mA
OFF to ON Time	20μs
ON to OFF Time	10μs
PWM Out	65kHz
Rise Time	10μs
Fall Time	20μs

Control & Logic Specifications

Control Language Support	Advanced Ladder Logic, Full IEC 61131-3
Logic Program Size & Logic Scan Rate	256kB Maximum, 1.2ms/kB
I/O Support	Digital Inputs - 1024
	Digital Outputs - 1024
	Analogue Inputs - 256
	Analogue Outputs - 256
General Purpose Registers	5,000 (words) Retentive 1,024 (bits) Retentive 1,024 (bits) Non-retentive
Non-Retentive Memory	128kB

Connectivity

Serial Ports	1 RS-232, 1 RS-485
USB mini-B	USB 2.0 (480MHz) Programming & Data Access
CAN	Remote I/O, Peer-to-Peer Comms, i3 Configurator
Remote I/O	IOS, Smart I/O, iSmart
Removable Memory	MicroSD™ (support for 32GB max) Application updates, Datalogging, more

Digital Relay Outputs

Outputs per Module	6 Relay
Commons per Module	6
Max. Switching Current per Relay	3A @ 250 VAC, Resistive
Max. Total Output Current	5A Continuous
Max. Switching Voltage	275 VAC, 30 VDC
Max. Switched Power	150W
Contact Isolation to Ground	1000 VAC
Max. Voltage Drop at Rated Current	0.5V
Expected Life (see below for detail)	No Load: 5,000,000 100,000 at rated load
Max. Switching Rate	300 CPM at no load 20 CPM at rated load
Type	Mechanical Contact
Response Time	One update per ladder scan plus 10ms

Digital DC Outputs - Sourcing

Outputs per Module	12 Including 2 Configurable PWM Outputs
Commons per Module	2
Type	Sourcing / 10kΩ pull-down
Absolute Max. Voltage	28VDC
Output Protection	Short Circuit
Max. Voltage Drop at Rated Current	0.25VDC
Max. Inrush	650mA
Max. Output per Point: Sourcing	2.4mA @ 24VDC
OFF to ON Time	1μs
ON to OFF Time	1μs
PWM Out	65kHz
Rise Time	150ns
Fall Time	150ns

i³A Lite Intelligent Control Station



Technical Specifications continued

Technical Datasheet

Analogue Inputs

Number of Channels	4
Safe Input Voltage Range	-0.5V to 12V
Nominal Resolution	12 Bits
Max. Over Current	35 mA
Max. Error at 25°C (excluding zero) Adjusting filtering may tighten	<1.50% of FS

Input Ranges	0-20 mA, 4-20 mA
Input Impedance (clamped @ -0.5VDC to 12VDC)	Current Mode: 100 Ω
%AI Full Scale	32,000
Conversion Speed	Once per Ladder Scan
Filtering	160 Hz hash (noise) filter 1-128 scan digital running average filter

Analogue Outputs

Number of Channels	2
Output Ranges	4-20mA
Nominal Resolution	12 Bits
Response Time	One update per ladder scan

Minimum Current Load	500Ω
Protection	Protection against miswire up to 24VDC
Conversion Speed	Min. all channels once per scan
Max. Error at 25°C (excluding zero)	0-20mA < 1.5% of FS


Approvals

Certifications	CE, UL, cUL, FCC
Shock Tested	IEC 60068-2-27
Vibration Tested	IEC 60068-2-6
IP Protection Degree	IP65 (NEMA 4X)

Port Connectors



Power Wiring



Primary Power Port Pins

Pin	Signal	Description
1	Ground	Frame Ground
2	DC -	Power Supply Common
3	DC+	Power Supply Voltage

DC Input / Frame

Solid/Stranded wire; 12-24AWG (2.5-0.2mm). Strip length - 0.28" (7mm)
Torque rating: 4.5-7.0 in/lbs (0.50-0.78Nm)
DC- is internally connected to I/O 0V
Class 2 power supply must be used to meet UL requirements

i³A Lite Intelligent Control Station




Wiring Connectors

Technical Datasheet


Model -10D14 Digital Out

Position / Pin	Digital Model
1	Q1 Output 1 (PWM)
2	Q2 Output 2 (PWM)
3	Q3 Output 3
4	Q4 Output 4
5	V+ External V+
6	C Common
7	Q5 Output 5
8	Q6 Output 6
9	Q7 Output 7
10	Q8 Output 8
11	Q9 Output 9
12	Q10 Output 10
13	Q11 Output 11
14	Q12 Output 12
15	V+ External V 2+
16	C Common

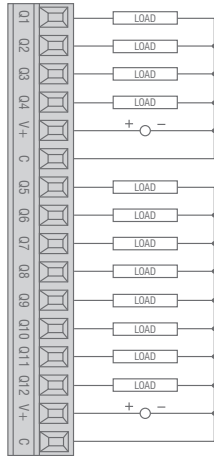

Model -10D12 Relay & Digital Out


Position / Pin	Digital Model
1	R1 Relay 1 NO
2	C1 Relay 1 C
3	R2 Relay 2 NO
4	C2 Relay 2 C
5	R3 Relay 3 NO
6	C3 Relay 3 C
7	R4 Relay 4 NO
8	C4 Relay 4 C
9	R5 Relay 5 NO
10	C5 Relay 5 C
11	R6 Relay 6 NO
12	C6 Relay 6 C
13	Q1 Output 1 (PWM)
14	Q2 Output 2 (PWM)
15	V+ External V+
16	C Common

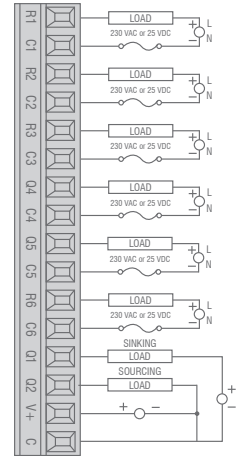

NOTE: Internal 10kΩ resistors between: V+ and Q1; V+ and Q2


Model -10D14 Sinking & Sourcing Outputs

Sinking Outputs




Sinking: Outputs can sink 500mA
Sourcing: 2.4mA sourcing @ 24mA

Sourcing Outputs




Digital Input

Position / Pin	Digital Model
1	I1 Input 1 (HSC)
2	I2 Input 2 (HSC)
3	I3 Input 3 (HSC)
4	I4 Input 4 (HSC)
5	I5 Input 5
6	I6 Input 6
7	I7 Input 7
8	I8 Input 8
9	I9 Input 9
10	I10 Input 10
11	I11 Input 11
12	I12 Input 12
13	C Common
14	C Common

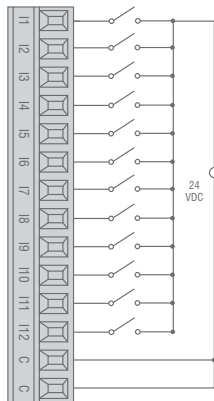

Analogue Input & Output



Position / Pin	Digital Model
1	AI1 Analogue Input 1
2	AI2 Analogue Input 2
3	AI3 Analogue Input 3
4	AI4 Analogue Input 4
5	C Common
6	C Common
7	AQ1 Analogue Output 1
8	AQ2 Analogue Output 2
9	C Common



Analogue Inputs

Raw input values are found in the registers as Integer-type data with a range from 0 - 32000.


Analogue input may be filtered digitally with the filter constant found in the i3 Configurator Hardware Configuration for Analogue Inputs. Valid filter values are 0-7 and act according to the following chart.

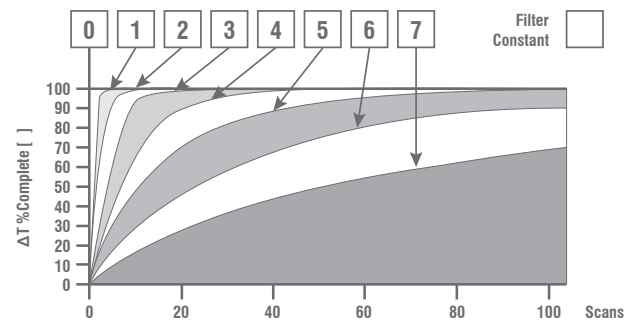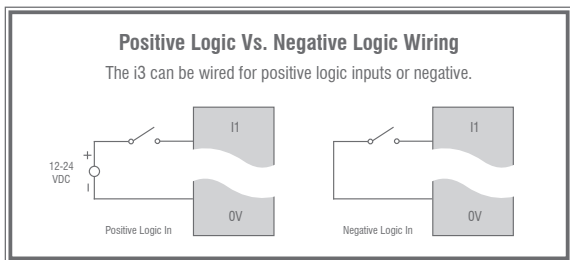

i³A Lite Intelligent Control Station



CAN Communication



Modular jack (8 posn RJ45)

CAN Pin Assignments


Pin	Signal
8	No Connection
7	Ground
6	Shield
5	No Connection
4	No Connection
3	Ground
2	CAN Data Low
1	CAN Data High

The CAN port is provided via the single 8-position modular jack labelled "CAN". It may be used to communicate with other i3 modules using μ CAN protocol. Additionally, remote expansion I/O such as Smart I/O may be implemented using the μ CAN protocol.

Termination for the CAN port may be enabled from the System Menu or System Register. This should only occur if the i3AL is at one end of the CAN network or the other. Only the two devices on either end of the CAN network should be terminated.

Serial Communication

Technical Datasheet



Modular jack (8 posn RJ45)

MJ1: RS-232 w/full handshaking

MJ2: RS-485 half-duplex

RS-485 termination and biasing via System Menu or System Register

Pin	MJ1 Pin		MJ2 Pin	
	Signal	Direction	Signal	Direction
8	TXD	OUT	--	
7	RXD	IN	--	
6	0V	Common	0V	
5	+5VDC @ 60mA	OUT	+5VDC @ \pm 60mA	OUT
4	RTS	OUT	--	--
3	CTS	IN	--	--
2	--	--	RX- / TX-	IN / OUT
1	--	--	RX+ / TX+	IN / OUT

Built-in I/O

Both i3AL models feature built-in I/O. The I/O is mapped into i3 register space, in three separate areas – Digital/Analogue I/O, High-Speed Counter I/O, and High-speed Output I/O. Digital/Analogue I/O location is fixed starting at 1, but the high-speed counter and high-speed output references may be mapped to any open register location. For more details on using the high-speed counter and high-speed outputs, see the i3AL User Manual.

Fixed Address	Digital/Analogue I/O Function	10D12	10D14
%I	Digital Inputs	1-12	1-12
	Reserved	13-23	13-32
%Q	Digital Outputs	1-6	1-12
	Reserved	7-16	13-16
%AI	Analogue Inputs	1-4	1-4
	Reserved	5-12	5-12
%AQ	Analogue Outputs	1-2	1-2
	Reserved	3-6	3-6

Reserved areas maintain backward compatibility with other models

Installation Dimensions

